

Coil Specification (at 20 °C)

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance ($\Omega \pm 8\%$)	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Maximum Allowable Voltage (VDC)
BRT2-D BRT2-DM	5	80.6	62	Abt. 0.4	75% Maximum	10% Minimum	130%
	6	66.7	90				
	9	44.6	202				
	12	33.3	360				
	24	16.7	1440				
	48	8.7	5520				


Ordering Information

BRT2	-	SS	-	2	12	D	M	
								Contact Form: Nil:One form C M:One form A B:One form B
								Coil Type: D: Standard DC Coil
								Coil Voltage: 03:3V, 05:5V, 06:6V, 09:9V 12:12V, 24:24V, 48:48V
								Number of Pole: 2:Two Pole
								Type of Sealing: SS:Plastic Sealed Type
								Type: BRT2

Classificatio

Model	BRT2			
Coil Sensitivity	Standard DC Coil		High Sensitivity DC Coil	
	2C	2A	2C	2A
Plastic Sealed Type	BRT2-SS-2□□D	BRT2-SS-2□□DM	BRT2-SS-2□□L	BRT2-SS-2□□LM

Dimension

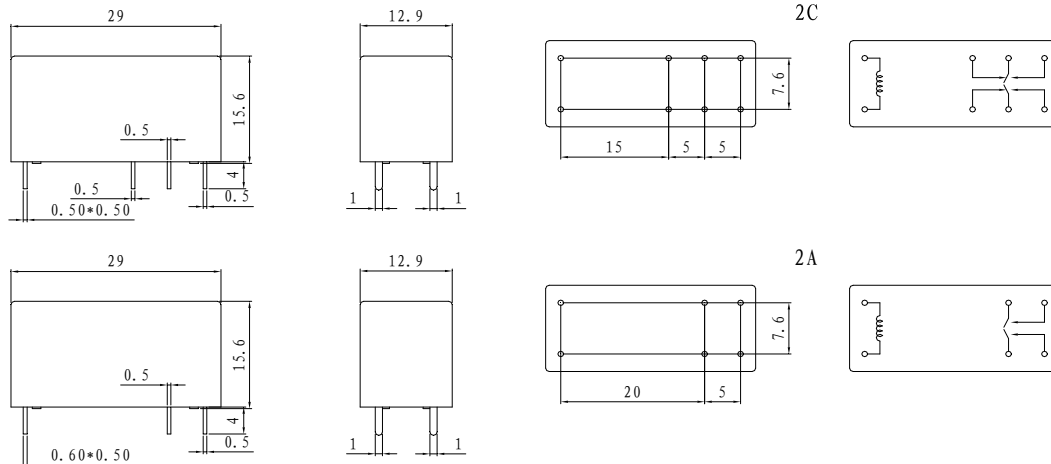

Dimension Tolerance: < 1mm: $\pm 0.2\text{mm}$
1--5mm: $\pm 0.3\text{mm}$
> 5mm: $\pm 0.5\text{mm}$



Patent: ZL 2010 2 0563196.2

Main Feature

1. Small size (29x12.9x15.6 in mm) produces a switching capacity up to 8A for high density P.C.Board mounting technique.
2. The contact form construction is 2A/2C
3. The Surge Resistance of BRT2 series is 10,000V
4. Sealing Construction (Free from dust and solder flux):
BRT2-SS: Plastic Sealed Type.
5. The selection of plastic insulation material is designed for high temperature and provides better chemical solution performance.
6. RoHS Compliant.

Application

Air Conditioning, Fridge, Washing Machine, etc Household Appliances

Contact Rating

- Nominal Load(Resistive Load Cos $\phi=1$)
Contact Capacity
BRT2-A/AM.....8A at 250VAC
8A at 30VDC
- Max. Allowable Current
BRT2-A/AM.....8A
- Max. Allowable Voltage
BRT2-A/AM.....AC250V
- Max. Allowable Power Force
BRT2-A/AM.....1.65VA \pm 10%
- Contact Material..... Ag Alloy
- Contact Form.....DPDT & DPST

Performance (at Initial Value)

- Contact Resistance..... $\leq 50m\Omega$ at 6VDC/1A
- Operate Time.....10ms. Max
- Release Time..... 5ms. Max
- Dielectric Strength:
Between Coil & Contact.....5,000VAC at 50/60 Hz
for one minute
Between Contacts.....1,000VAC at 50/60 Hz
for one minute
- Surge Resistance.....10,000V (between Coil
& Contact 1.2x50 μ s)
- Insulation Resistance..... 1,000 Mega Ω Min. at
500VDC

- Max. On/Off Switching:
Electrical.....30 Ops per minute
Mechanical.....300 Ops per minute
- Temperature Range..... - 40~85 $^{\circ}$ C
- Humidity Range.....5%~85% RH
- Coil Temperature Rise..... 35 $^{\circ}$ C Maximum
- Vibration:
Endurance.....10 to 55 Hz dual
amplitude width 1.5mm
Error Operation.....10 to 55 Hz dual
amplitude width 1.5mm
- Shock:
Endurance..... 981m/s² Min
Error Operation..... 98.1m/s² Min
- Life Expectancy:
Electrical.....10⁵ Operations at
Rated Resistive
load
Mechanical.....10⁷ Operations at
No load condition
- Weight.....about 13g

Safety Standard & Its File Number

Coil Specification (at 20 °C)

Coil Sensitivity	Nominal Voltage (VAC)	Nominal Current (mA)	Coil Resistance ($\Omega \pm 8\%$)	Power Consumption (W)	Pull-In Voltage (VAC)	Drop-Out Voltage (VAC)	Maximum Allowable Voltage (VAC)
BRT2-A BRT2-AM	220	7.5	29333	1.65	75% Maximum	10% Minimum	130%


Ordering Information

BRT2	-	SS	-	2	220	A	M	Contact Form: Nil:One form C M:One form A
								Coil Type: A: Standard AC Coil
								Coil Voltage: 220:220V
								Number of Pole: 2:Two Pole
								Type of Sealing: SS:Plastic Sealed Type
								Type: BRT2

Classificatio

Model	BRT2	
Coil Sensitivity	Standard AC Coil	
Plastic Sealed Type	2C	2A
	BRT2-SS-2□□A	BRT2-SS-2□□AM

Dimension

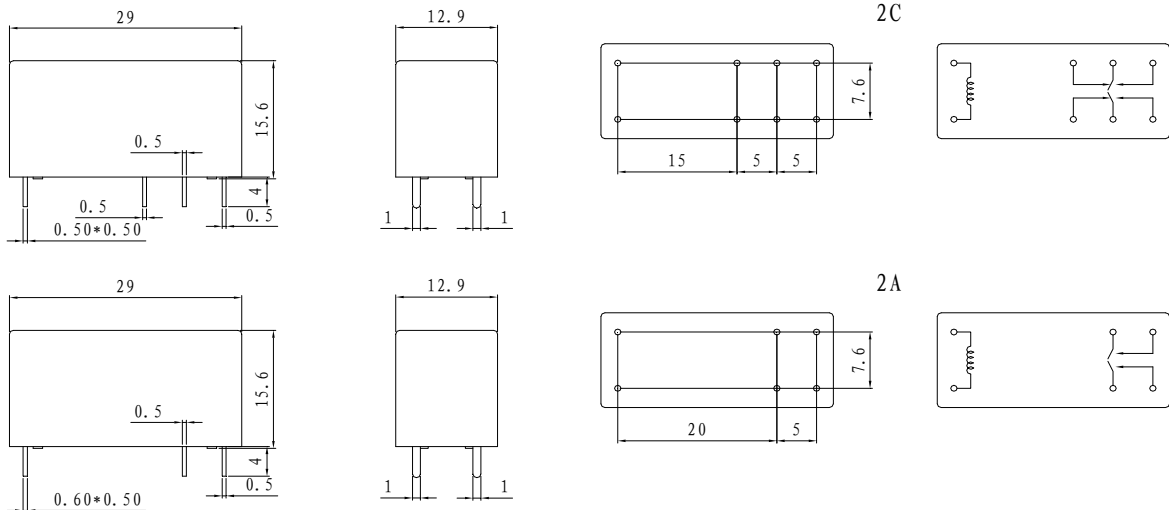

Dimension Tolerance: < 1mm: $\pm 0.2\text{mm}$
 1--5mm: $\pm 0.3\text{mm}$
 > 5mm: $\pm 0.5\text{mm}$